

STARPOWER

SEMICONDUCTOR

IGBT


GD100HFT170C1S

Molding Type Module

1700V/100A 2 in one-package


General Description

STARPOWER IGBT Power Module provides ultra low conduction loss as well as short circuit ruggedness. They are designed for the applications such as AC inverters.

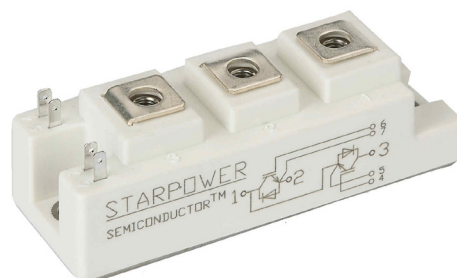

Features

- Low $V_{CE(sat)}$ trench IGBT technology
- Low switching losses
- 10 μ s short circuit capability
- $V_{CE(sat)}$ with positive temperature coefficient
- Low inductance case
- Fast & soft reverse recovery anti-parallel FWD
- Isolated copper baseplate using DBC technology

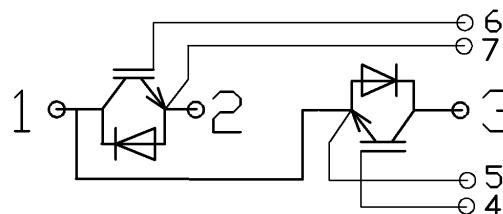

Equivalent Circuit Schematic

Typical Applications

- AC inverter drives mains 575-750V AC
- Public transport (auxiliary syst.)

Absolute Maximum Ratings $T_C=25^\circ\text{C}$ unless otherwise noted

Symbol	Description	GD100HFT170C1S	Units
V_{CES}	Collector-Emitter Voltage	1700	V

Symbol	Description	GD100HFT170C1S	Units
V_{GES}	Gate-Emitter Voltage	± 20	V
I_C	Collector Current @ $T_C=25^\circ\text{C}$ @ $T_C=80^\circ\text{C}$	165	A
		100	
I_{CM}	Pulsed Collector Current $t_p=1\text{ms}$	200	A
I_F	Diode Continuous Forward Current	100	A
I_{FM}	Diode Maximum Forward Current	200	A
P_D	Maximum Power Dissipation @ $T_j=175^\circ\text{C}$	789	W
T_{SC}	Short Circuit Withstand Time @ $T_j=125^\circ\text{C}$	10	μs
T_{jmax}	Maximum Junction Temperature	175	$^\circ\text{C}$
T_{jop}	Operating Junction Temperature	-40 to +150	$^\circ\text{C}$
T_{STG}	Storage Temperature Range	-40 to +125	$^\circ\text{C}$
$I^2t\text{-value, Diode}$	$V_R=0\text{V}, t=10\text{ms}, T_j=125^\circ\text{C}$	1800	A^2s
V_{ISO}	Isolation Voltage RMS, $f=50\text{Hz}, t=1\text{min}$	4000	V
Mounting Torque	Power Terminal Screw:M5	2.5 to 5.0	N.m
	Mounting Screw:M6	3.0 to 5.0	N.m

Electrical Characteristics of IGBT $T_C=25^\circ\text{C}$ unless otherwise noted

Off Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
BV_{CES}	Collector-Emitter Breakdown Voltage	$V_{GE}=0\text{V}, I_C=3.5\text{mA}, T_j=25^\circ\text{C}$	1700			V
I_{CES}	Collector Cut-Off Current	$V_{CE}=V_{CES}, V_{GE}=0\text{V}, T_j=25^\circ\text{C}$			3.0	mA
I_{GES}	Gate-Emitter Leakage Current	$V_{GE}=V_{GES}, V_{CE}=0\text{V}, T_j=25^\circ\text{C}$			400	nA

On Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=4.0\text{mA}, V_{CE}=V_{GE}, T_j=25^\circ\text{C}$	5.2	5.8	6.4	V
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	$I_C=100\text{A}, V_{GE}=15\text{V}, T_j=25^\circ\text{C}$		2.0		V
		$I_C=100\text{A}, V_{GE}=15\text{V}, T_j=125^\circ\text{C}$		2.4		

Switching Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=900\text{V}, I_C=100\text{A}, R_G=4.0\Omega, V_{GE}=\pm 15\text{V}, T_j=25^\circ\text{C}$		370		ns
t_r	Rise Time			40		ns
$t_{d(off)}$	Turn-Off Delay Time			650		ns
t_f	Fall Time	$V_{CC}=900\text{V}, I_C=100\text{A},$		180		ns

E_{on}	Turn-On Switching Loss	$R_G=4.0\Omega, V_{GE}=\pm 15V,$ $T_J=25^\circ C$		22.0		mJ
E_{off}	Turn-Off Switching Loss			21.5		mJ
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=900V, I_C=100A,$ $R_G=4.0\Omega, V_{GE}=\pm 15V,$ $T_J=125^\circ C$		400		ns
t_r	Rise Time			50		ns
$t_{d(off)}$	Turn-Off Delay Time			800		ns
t_f	Fall Time			300		ns
E_{on}	Turn-On Switching Loss			32.0		mJ
E_{off}	Turn-Off Switching Loss			31.5		mJ
C_{ies}	Input Capacitance	$V_{CE}=25V, f=1MHz,$ $V_{GE}=0V$		8.82		nF
C_{oes}	Output Capacitance			0.37		nF
C_{res}	Reverse Transfer Capacitance			0.29		nF
I_{SC}	SC Data	$t_{sc}\leq 10\mu s, V_{GE}=15V,$ $T_J=125^\circ C, V_{CC}=1000V,$ $V_{CEM}\leq 1700V$		400		A
R_{Gint}	Internal Gate Resistance			7.5		Ω
L_{CE}	Stray Inductance				30	nH
$R_{CC'+EE'}$	Module Lead Resistance, Terminal to Chip	$T_C=25^\circ C$		0.75		m Ω

Electrical Characteristics of DIODE $T_C=25^\circ C$ unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
V_F	Diode Forward Voltage	$I_F=100A$	$T_J=25^\circ C$	1.80		V
			$T_J=125^\circ C$	1.90		
Q_r	Diode Reverse Recovery Charge	$I_F=100A,$ $V_R=900V,$ $di/dt=-2450A/\mu s,$ $V_{GE}=-15V$	$T_J=25^\circ C$	29.0		μC
			$T_J=125^\circ C$	48.5		
I_{RM}	Diode Peak Reverse Recovery Current		$T_J=25^\circ C$	155		A
			$T_J=125^\circ C$	165		
E_{rec}	Reverse Recovery Energy		$T_J=25^\circ C$	15.5		mJ
			$T_J=125^\circ C$	27.5		

Thermal Characteristics

Symbol	Parameter	Typ.	Max.	Units
$R_{\theta JC}$	Junction-to-Case (IGBT Part, per 1/2 Module)		0.19	K/W
$R_{\theta JC}$	Junction-to-Case (DIODE Part, per 1/2 Module)		0.38	K/W
$R_{\theta CS}$	Case-to-Sink (Conductive grease applied)	0.05		K/W
Weight	Weight of Module	150		g

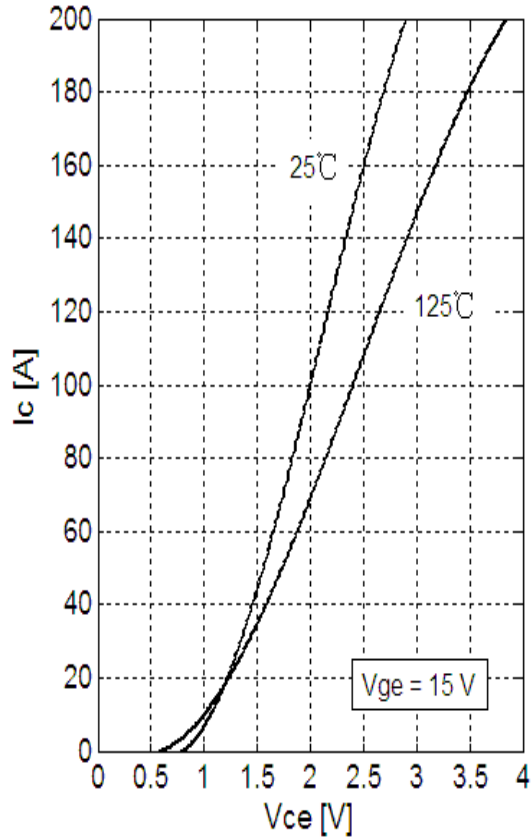


Fig 1. IGBT Typical Output Characteristics

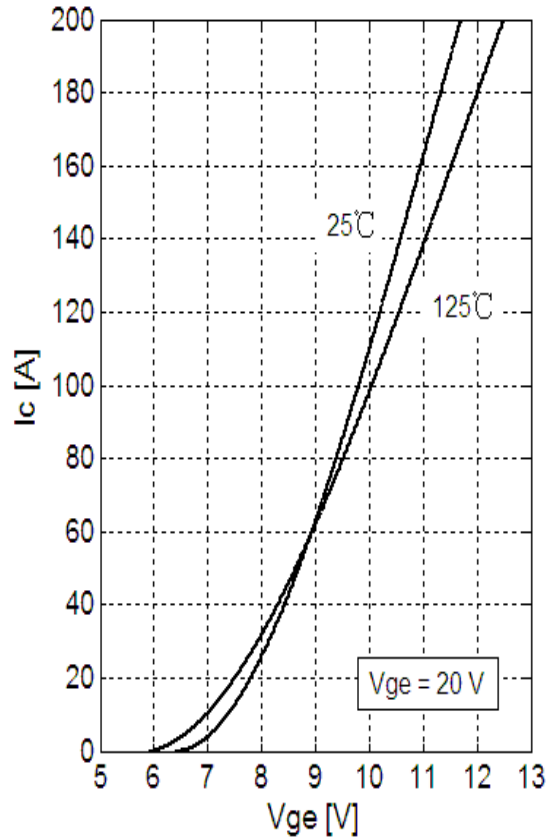


Fig 2. IGBT Typical Transfer Characteristics

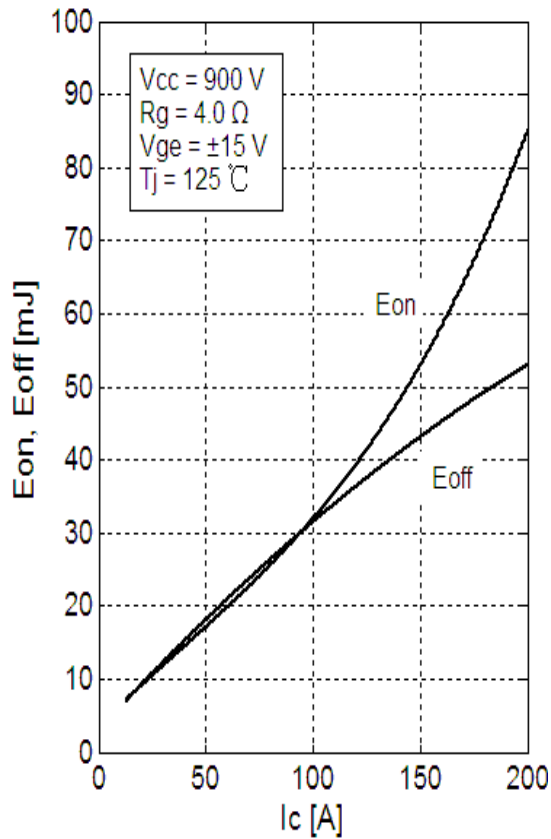


Fig 3. IGBT Switching Loss vs. Collector Current

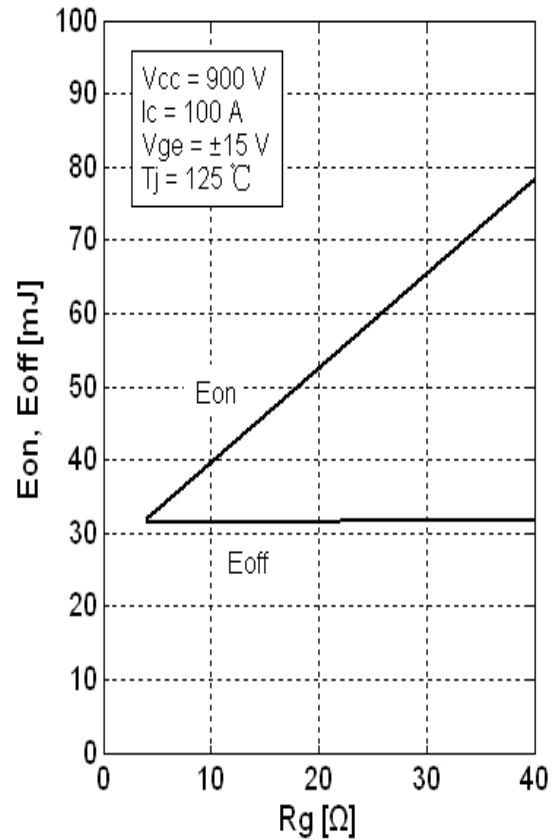


Fig 4. IGBT Switching Loss vs. Gate Resistor

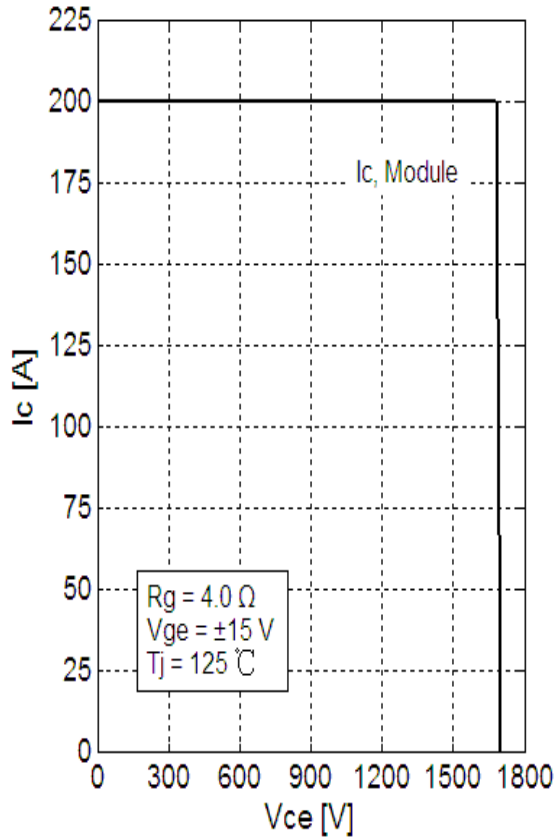


Fig 5. RBSOA

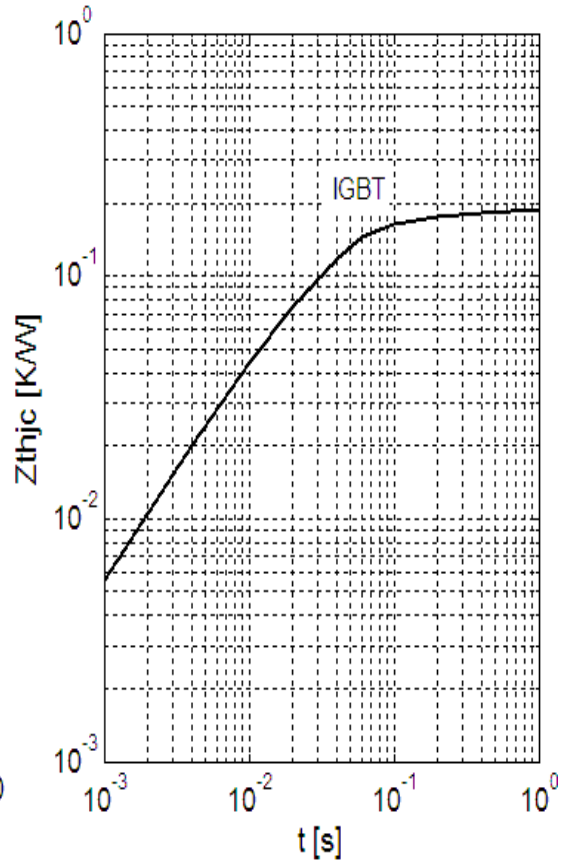


Fig 6. IGBT Transient Thermal Impedance

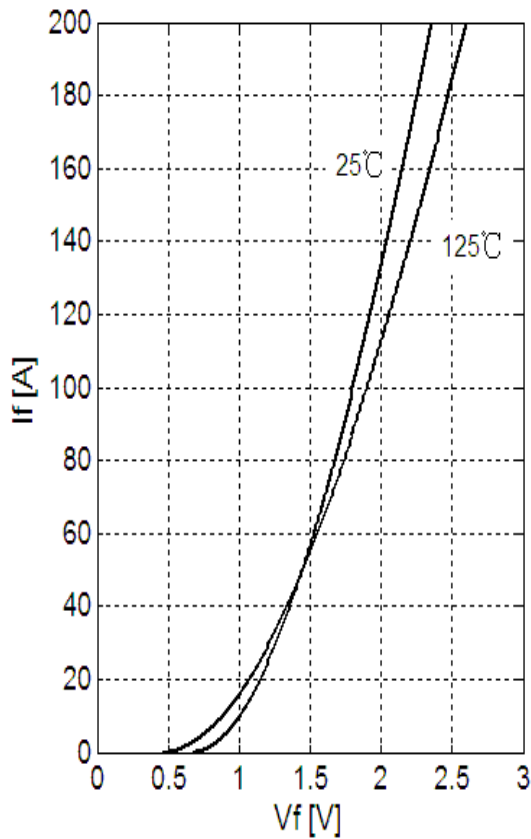


Fig 7. Forward Characteristics of Diode

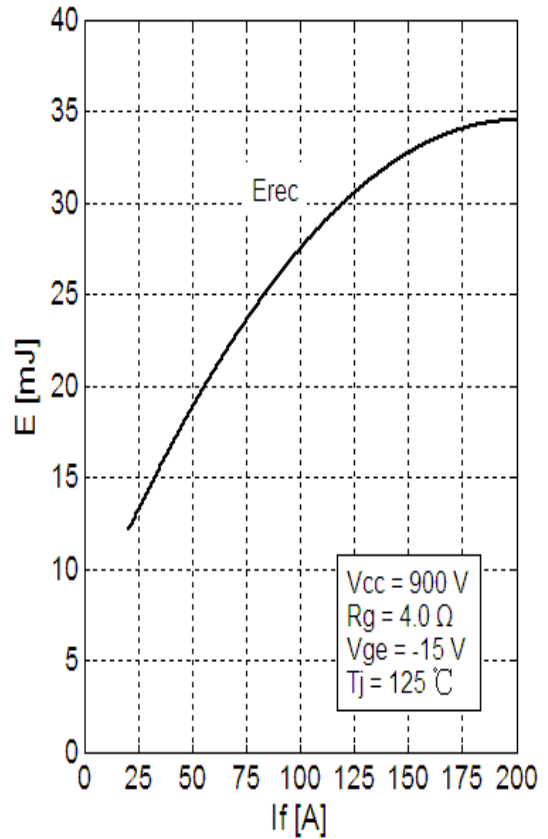


Fig 8. Diode Switching Loss vs. Collector Current

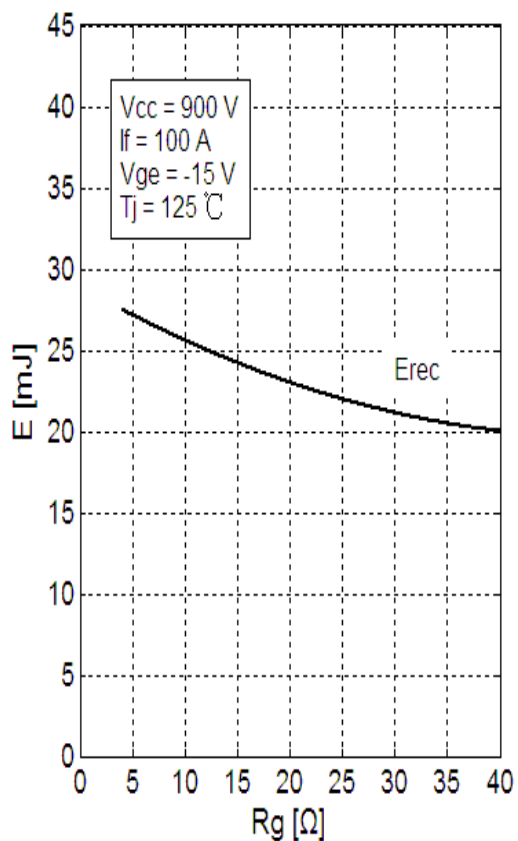


Fig9. Diode Switching Loss vs. Gate Resistor


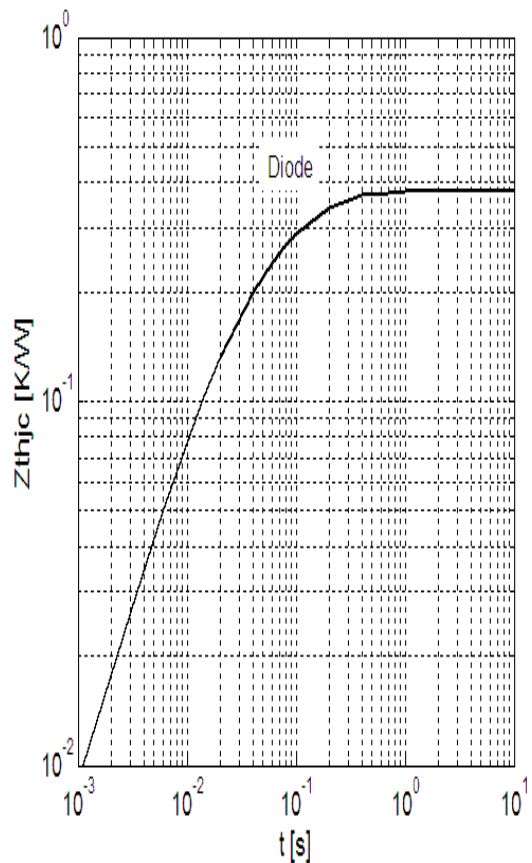


Fig 10. Diode Transient Thermal Impedance

Package Dimension

Dimensions in Millimeters

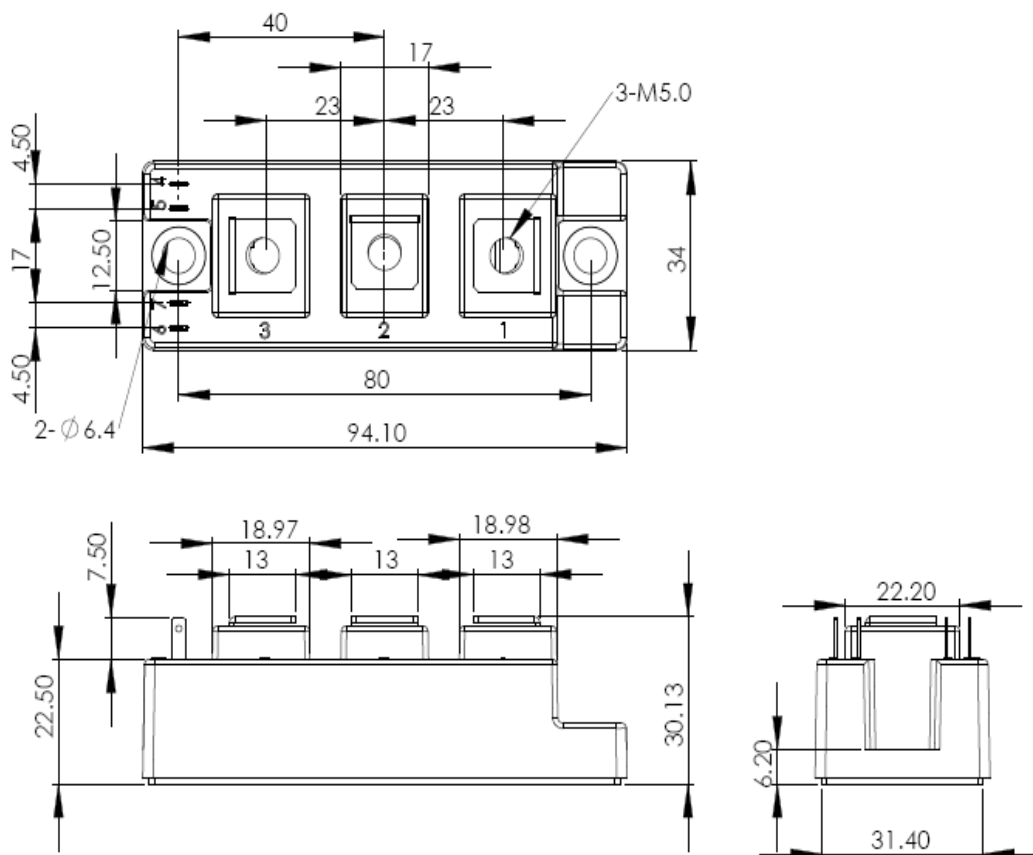

Terms and Conditions of Usage

The data contained in this product datasheet is exclusively intended for technically trained staff. you and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

This product data sheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics.

Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see www.powersemi.cc), For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify.

If and to the extent necessary, please forward equivalent notices to your customers.
Changes of this product data sheet are reserved.