

# STARPOWER

SEMICONDUCTOR

**IGBT**


## GD30PJT60F3S

Molding Type Module

**600V/30A PIM in one-package**

### General Description

STARPOWER IGBT Power Module provides ultra low conduction loss as well as short circuit ruggedness. They are designed for the applications such as general inverters and UPS.

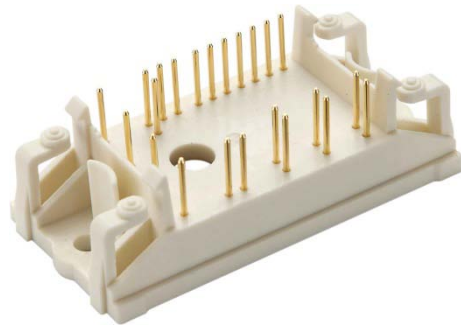

### Features

- Low  $V_{CE(sat)}$  trench IGBT technology
- 5 $\mu$ s short circuit capability
- $V_{CE(sat)}$  with positive temperature coefficient
- Maximum junction temperature 175 °C
- Fast & soft reverse recovery anti-parallel FWD

### Typical Applications

- Inverter for motor drive
- AC and DC servo drive amplifier
- Uninterruptible power supply

**IGBT-inverter**  $T_C=25^\circ\text{C}$  unless otherwise noted**Maximum Rated Values**

Symbol	Description	GD30PJT60F3S	Units
$V_{CES}$	Collector-Emitter Voltage @ $T_j=25^\circ\text{C}$	600	V
$V_{GES}$	Gate-Emitter Voltage @ $T_j=25^\circ\text{C}$	$\pm 20$	V
$I_C$	Collector Current @ $T_C=25^\circ\text{C}$ @ $T_C=80^\circ\text{C}$	45 30	A
$I_{CM}$	Pulsed Collector Current $t_p=1\text{ms}$	60	A
$P_{tot}$	Total Power Dissipation @ $T_j=175^\circ\text{C}$	125	W

**Off Characteristics**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	$T_j=25^\circ\text{C}$	600			V
$I_{CES}$	Collector Cut-Off Current	$V_{CE}=V_{CES}, V_{GE}=0\text{V},$ $T_j=25^\circ\text{C}$			1.0	mA
$I_{GES}$	Gate-Emitter Leakage Current	$V_{GE}=V_{GES}, V_{CE}=0\text{V},$ $T_j=25^\circ\text{C}$			400	nA

**On Characteristics**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=1.0\text{mA}, V_{CE}=V_{GE},$ $T_j=25^\circ\text{C}$	4.0	4.8	6.5	V
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	$I_C=30\text{A}, V_{GE}=15\text{V},$ $T_j=25^\circ\text{C}$		1.60	2.05	V
		$I_C=30\text{A}, V_{GE}=15\text{V},$ $T_j=125^\circ\text{C}$		1.80		
		$I_C=30\text{A}, V_{GE}=15\text{V},$ $T_j=150^\circ\text{C}$		1.85		

## Switching Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300V, I_C=30A,$ $R_G=15\Omega, V_{GE}=\pm 15V,$ $T_j=25^\circ C$		77		ns
$t_r$	Rise Time			39		ns
$t_{d(off)}$	Turn-Off Delay Time			81		ns
$t_f$	Fall Time			101		ns
$E_{on}$	Turn-On Switching Loss			0.75		mJ
$E_{off}$	Turn-Off Switching Loss			0.29		mJ
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300V, I_C=30A,$ $R_G=15\Omega, V_{GE}=\pm 15V,$ $T_j=125^\circ C$		78		ns
$t_r$	Rise Time			39		ns
$t_{d(off)}$	Turn-Off Delay Time			84		ns
$t_f$	Fall Time			121		ns
$E_{on}$	Turn-On Switching Loss			0.86		mJ
$E_{off}$	Turn-Off Switching Loss			0.37		mJ
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300V, I_C=30A,$ $R_G=15\Omega, V_{GE}=\pm 15V,$ $T_j=150^\circ C$		79		ns
$t_r$	Rise Time			41		ns
$t_{d(off)}$	Turn-Off Delay Time			86		ns
$t_f$	Fall Time			126		ns
$E_{on}$	Turn-On Switching Loss			0.96		mJ
$E_{off}$	Turn-Off Switching Loss			0.40		mJ
$C_{ies}$	Input Capacitance	$V_{CE}=30V, f=1Mhz,$ $V_{GE}=0V$		2.11		nF
$C_{oes}$	Output Capacitance			0.20		nF
$C_{res}$	Reverse Transfer Capacitance			0.07		nF
$Q_G$	Gate Charge	$V_{CC}=400V, I_C=30A,$ $V_{GE}=15V$		59		nC
$R_{Gint}$	Internal Gate Resister			/		$\Omega$
$I_{SC}$	SC Data	$t_p \leq 5\mu s, V_{GE}=15V,$ $T_j=125^\circ C, V_{CC}=400V,$ $V_{CEM} \leq 600V$		315		A

**Diode-inverter**  $T_c=25^\circ\text{C}$  unless otherwise noted**Maximum Rated Values**

Symbol	Description	GD30PJT60F3S	Units
$V_{RRM}$	Repetitive Peak Reverse Voltage @ $T_j=25^\circ\text{C}$	600	V
$I_F$	DC Forward Current	30	A
$I_{FRM}$	Repetitive Peak Forward Current $t_p=1\text{ms}$	60	A

**Characteristics Values**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_F$	Diode Forward Voltage	$I_F=30\text{A}$ , $V_{GE}=0\text{V}$	$T_j=25^\circ\text{C}$	1.45	1.90	V
			$T_j=125^\circ\text{C}$	1.43		
			$T_j=150^\circ\text{C}$	1.41		
$Q_r$	Recovered Charge	$I_F=30\text{A}$ , $V_R=300\text{V}$ , $R_G=15\Omega$ , $V_{GE}=-15\text{V}$	$T_j=25^\circ\text{C}$	1.6		$\mu\text{C}$
			$T_j=125^\circ\text{C}$	2.3		
			$T_j=150^\circ\text{C}$	2.5		
$I_{RM}$	Peak Reverse Recovery Current	$I_F=30\text{A}$ , $V_R=300\text{V}$ , $R_G=15\Omega$ , $V_{GE}=-15\text{V}$	$T_j=25^\circ\text{C}$	29		A
			$T_j=125^\circ\text{C}$	30		
			$T_j=150^\circ\text{C}$	34		
$E_{\text{rec}}$	Reverse Recovery Energy	$I_F=30\text{A}$ , $V_R=300\text{V}$ , $R_G=15\Omega$ , $V_{GE}=-15\text{V}$	$T_j=25^\circ\text{C}$	0.33		mJ
			$T_j=125^\circ\text{C}$	0.40		
			$T_j=150^\circ\text{C}$	0.54		

**Diode-rectifier**  $T_c=25^\circ\text{C}$  unless otherwise noted**Maximum Rated Values**

Symbol	Description	GD30PJT60F3S	Units
$V_{RRM}$	Repetitive Peak Reverse Voltage @ $T_j=25^\circ\text{C}$	1600	V
$I_{F(AV)}$	Average On-state Current @ $T_c=80^\circ\text{C}$	30	A
$I_{RMSM}$	Maximum RMS Current At Rectifier Output @ $T_c=80^\circ\text{C}$	40	A
$I_{FSM}$	Surge Forward Current $V_R=0\text{V}$ , $t_p=10\text{ms}$ , $T_j=45^\circ\text{C}$	270	A
$I^2t$	$I^2t$ -value, $V_R=0\text{V}$ , $t_p=10\text{ms}$ , $T_j=45^\circ\text{C}$	360	$\text{A}^2\text{s}$

**Characteristics Values**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_F$	Diode Forward Voltage	$I_F=30\text{A}$ $T_j=150^\circ\text{C}$		1.20		V
$I_R$	Reverse Current	$T_j=150^\circ\text{C}$ , $V_R=1600\text{V}$			1.0	mA

**IGBT-brake-chopper**  $T_C=25^\circ\text{C}$  unless otherwise noted**Maximum Rated Values**

Symbol	Description	GD30PJT60F3S	Units
$V_{CES}$	Collector-Emitter Voltage @ $T_j=25^\circ\text{C}$	600	V
$V_{GES}$	Gate-Emitter Voltage @ $T_j=25^\circ\text{C}$	$\pm 20$	V
$I_C$	Collector Current @ $T_C=25^\circ\text{C}$	27	A
	@ $T_C=80^\circ\text{C}$	20	
$I_{CM}$	Pulsed Collector Current $t_p=1\text{ms}$	40	A
$P_{tot}$	Total Power Dissipation @ $T_j=175^\circ\text{C}$	85	W

**Off Characteristics**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{(BR)CES}$	Collector-Emitter Breakdown Voltage	$T_j=25^\circ\text{C}$	600			V
$I_{CES}$	Collector Cut-Off Current	$V_{CE}=V_{CES}, V_{GE}=0\text{V}, T_j=25^\circ\text{C}$			1.0	mA
$I_{GES}$	Gate-Emitter Leakage Current	$V_{GE}=V_{GES}, V_{CE}=0\text{V}, T_j=25^\circ\text{C}$			400	nA

**On Characteristics**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_{GE(th)}$	Gate-Emitter Threshold Voltage	$I_C=500\mu\text{A}, V_{CE}=V_{GE}, T_j=25^\circ\text{C}$	4.0	5.5	6.5	V
$V_{CE(sat)}$	Collector to Emitter Saturation Voltage	$I_C=20\text{A}, V_{GE}=15\text{V}, T_j=25^\circ\text{C}$		1.85	2.30	V
		$I_C=20\text{A}, V_{GE}=15\text{V}, T_j=125^\circ\text{C}$		2.10		
		$I_C=20\text{A}, V_{GE}=15\text{V}, T_j=150^\circ\text{C}$		2.15		

## Switching Characteristics

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300V, I_C=20A,$ $R_G=15\Omega, V_{GE}=\pm 15V,$ $T_j=25^\circ C$		45		ns
$t_r$	Rise Time			33		ns
$t_{d(off)}$	Turn-Off Delay Time			54		ns
$t_f$	Fall Time			110		ns
$E_{on}$	Turn-On Switching Loss			0.71		mJ
$E_{off}$	Turn-Off Switching Loss			0.16		mJ
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300V, I_C=20A,$ $R_G=15\Omega, V_{GE}=\pm 15V,$ $T_j=125^\circ C$		45		ns
$t_r$	Rise Time			37		ns
$t_{d(off)}$	Turn-Off Delay Time			54		ns
$t_f$	Fall Time			127		ns
$E_{on}$	Turn-On Switching Loss			0.78		mJ
$E_{off}$	Turn-Off Switching Loss			0.21		mJ
$t_{d(on)}$	Turn-On Delay Time	$V_{CC}=300V, I_C=20A,$ $R_G=15\Omega, V_{GE}=\pm 15V,$ $T_j=150^\circ C$		48		ns
$t_r$	Rise Time			38		ns
$t_{d(off)}$	Turn-Off Delay Time			54		ns
$t_f$	Fall Time			133		ns
$E_{on}$	Turn-On Switching Loss			0.78		mJ
$E_{off}$	Turn-Off Switching Loss			0.24		mJ
$C_{ies}$	Input Capacitance	$V_{CE}=30V, f=1Mhz,$ $V_{GE}=0V$		1.04		nF
$C_{oes}$	Output Capacitance			0.09		nF
$C_{res}$	Reverse Transfer Capacitance			0.03		nF
$Q_G$	Gate Charge	$V_{CC}=400V, I_C=20A,$ $V_{GE}=15V$		40		nC
$R_{Gint}$	Internal Gate Resister			/		$\Omega$
$I_{SC}$	SC Data	$t_p \leq 5\mu s, V_{GE}=15V,$ $T_j=125^\circ C, V_{CC}=400V,$ $V_{CEM} \leq 600V$		162		A

**Diode-brake-chopper**  $T_C=25^\circ\text{C}$  unless otherwise noted**Maximum Rated Values**

Symbol	Description	GD30PJT60F3S	Units
$V_{RRM}$	Repetitive Peak Reverse Voltage @ $T_j=25^\circ\text{C}$	600	V
$I_F$	DC Forward Current	15	A
$I_{FRM}$	Repetitive Peak Forward Current $t_p=1\text{ms}$	30	A

**Characteristics Values**

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$V_F$	Diode Forward Voltage	$I_F=15\text{A}$ , $V_{GE}=0\text{V}$	$T_j=25^\circ\text{C}$	1.35	1.80	V
			$T_j=125^\circ\text{C}$	1.32		
			$T_j=150^\circ\text{C}$	1.30		
$Q_r$	Recovered Charge	$I_F=15\text{A}$ , $V_R=300\text{V}$ , $R_G=15\Omega$ , $V_{GE}=-15\text{V}$	$T_j=25^\circ\text{C}$	1.1		$\mu\text{C}$
			$T_j=125^\circ\text{C}$	1.5		
			$T_j=150^\circ\text{C}$	1.8		
$I_{RM}$	Peak Reverse Recovery Current	$I_F=15\text{A}$ , $V_R=300\text{V}$ , $R_G=15\Omega$ , $V_{GE}=-15\text{V}$	$T_j=25^\circ\text{C}$	20		A
			$T_j=125^\circ\text{C}$	22		
			$T_j=150^\circ\text{C}$	24		
$E_{rec}$	Reverse Recovery Energy	$I_F=15\text{A}$ , $V_R=300\text{V}$ , $R_G=15\Omega$ , $V_{GE}=-15\text{V}$	$T_j=25^\circ\text{C}$	0.24		mJ
			$T_j=125^\circ\text{C}$	0.34		
			$T_j=150^\circ\text{C}$	0.40		

**NTC**  $T_C=25^\circ\text{C}$  unless otherwise noted

Symbol	Parameter	Test Conditions	Min.	Typ.	Max.	Units
$R_{25}$	Rated Resistance			22.0		$\text{k}\Omega$
$\Delta R/R$	Deviation of $R_{100}$	$T_C=100^\circ\text{C}$ , $R_{100}=1486.1\Omega$	-5		5	%
$P_{25}$	Power Dissipation				200	mW
$B_{25/50}$	B-value	$R_2=R_{25}\exp[B_{25/50}(1/T_2-1/(298.15\text{K}))]$		4000		K

**IGBT Module**

Symbol	Parameter	Min.	Typ.	Max.	Units
V <sub>ISO</sub>	Isolation Voltage RMS, f=50Hz, t=1 min	4000			V
R <sub>θJC</sub>	Junction-to-Case (per IGBT-inverter)			1.204	K/W
	Junction-to-Case (per Diode-inverter)			1.983	
	Junction-to-Case (per Diode-rectifier)			1.623	
	Junction-to-Case (per IGBT-brake-chopper)			1.770	
	Junction-to-Case (per Diode-brake-chopper)			2.854	
R <sub>θCS</sub>	Case-to-Sink (per IGBT-inverter)		0.547		K/W
	Case-to-Sink (per Diode-inverter)		0.901		
	Case-to-Sink (per Diode-rectifier)		0.737		
	Case-to-Sink (per IGBT-brake-chopper)		0.804		
	Case-to-Sink (per Diode-brake-chopper)		1.297		
R <sub>θCS</sub>	Case-to-Sink (Conductive grease applied)		0.036		K/W
T <sub>jmax</sub>	Maximum Junction Temperature (inverter,brake)			175	°C
	Maximum Junction Temperature(rectifier)			150	
T <sub>jop</sub>	Operating Junction Temperature	-40		150	°C
T <sub>STG</sub>	Storage Temperature Range	-40		125	°C



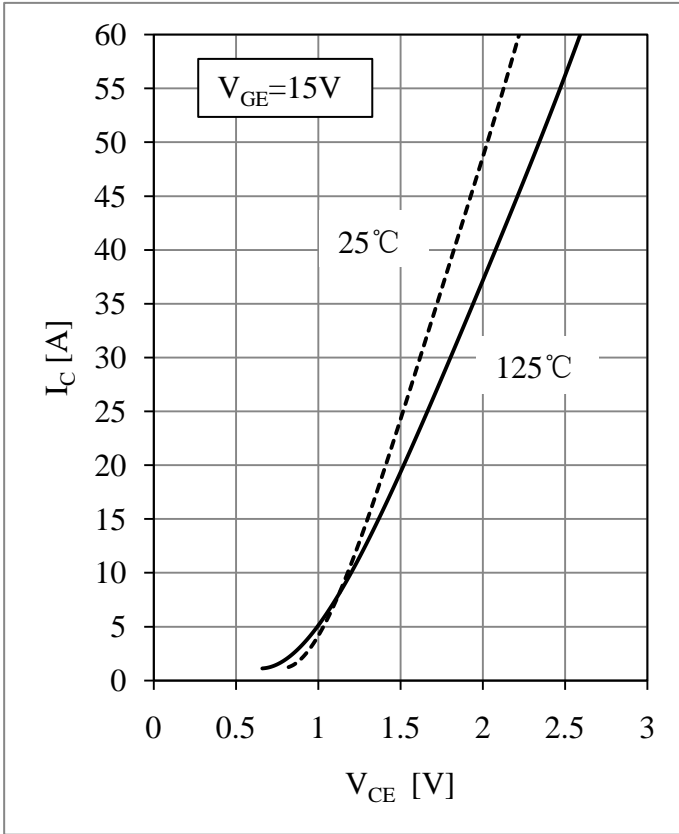


Fig 1. IGBT-inverter Output Characteristics

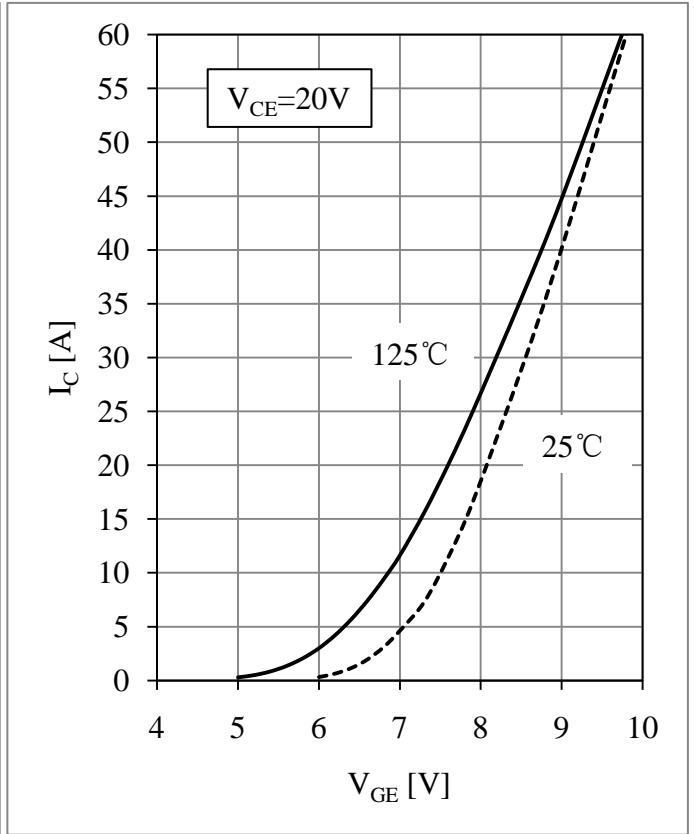


Fig 2. IGBT-inverter Transfer Characteristics

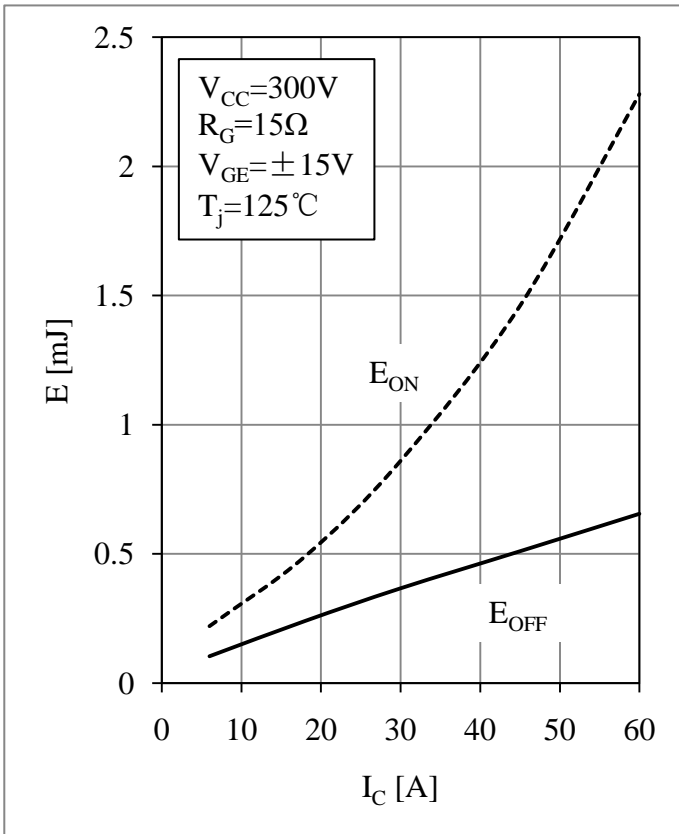


Fig 3. IGBT-inverter Switching Loss vs.  $I_C$

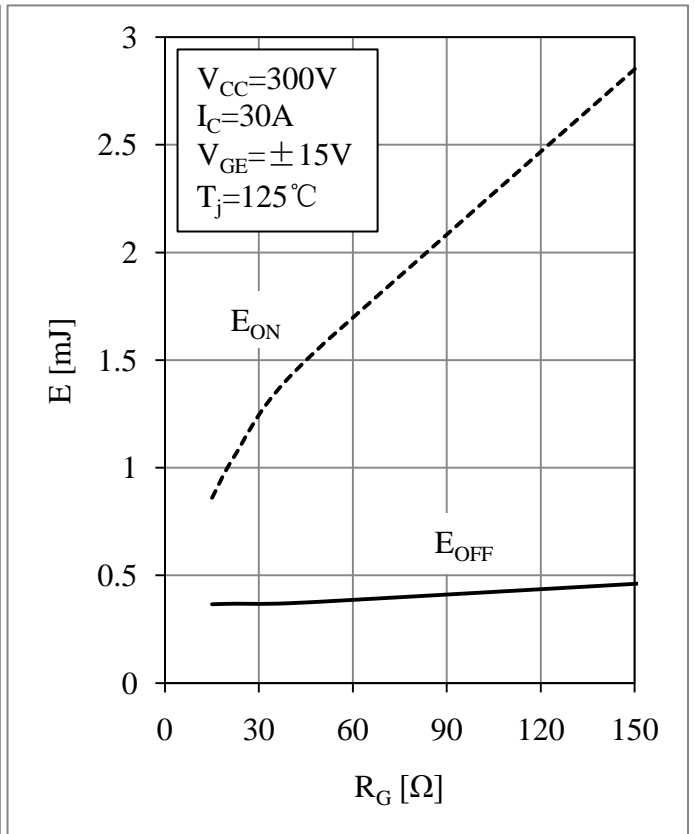


Fig 4. IGBT-inverter Switching Loss vs.  $R_G$

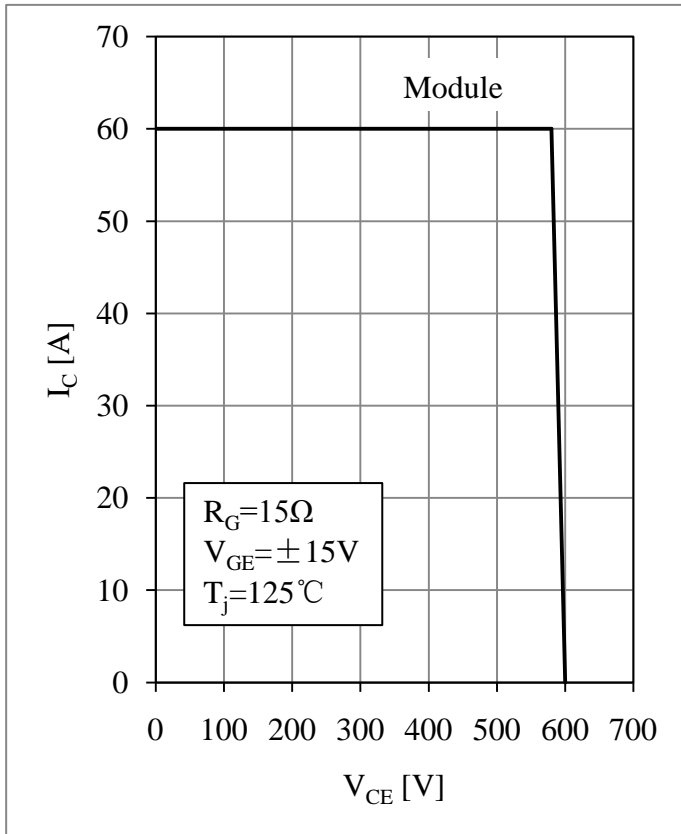


Fig 5. IGBT-inverter RBSOA

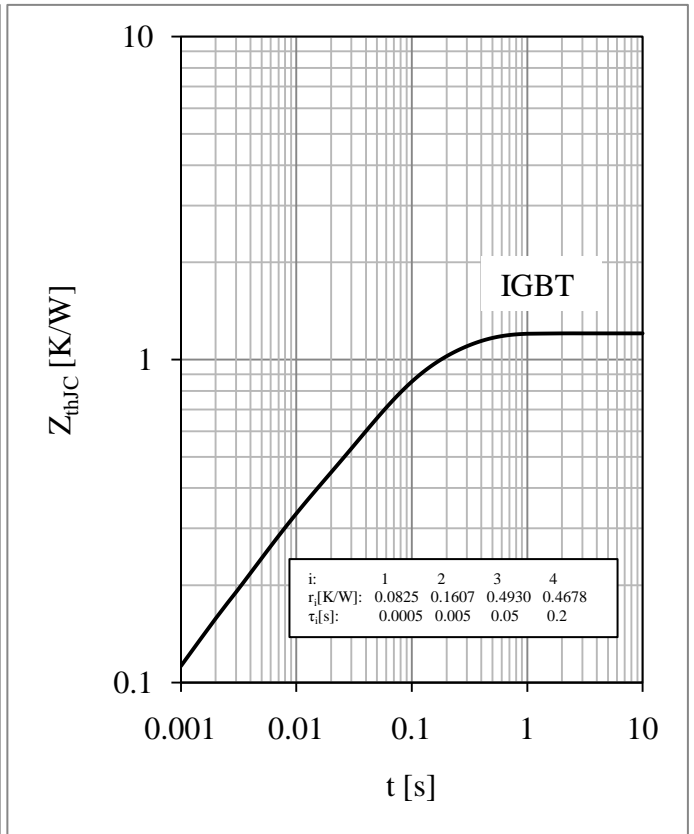


Fig 6. IGBT-inverter Transient Thermal Impedance

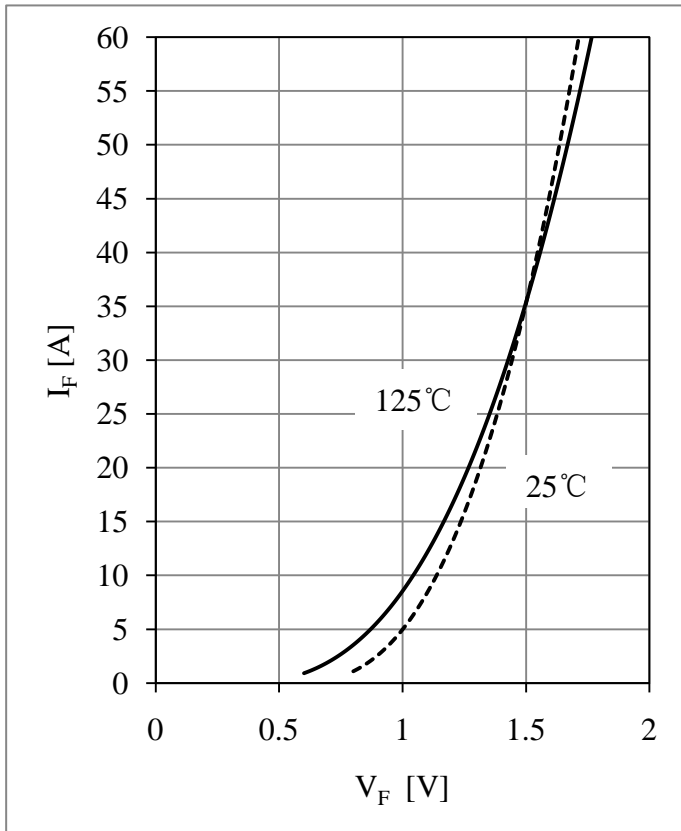


Fig 7. Diode-inverter Forward Characteristics

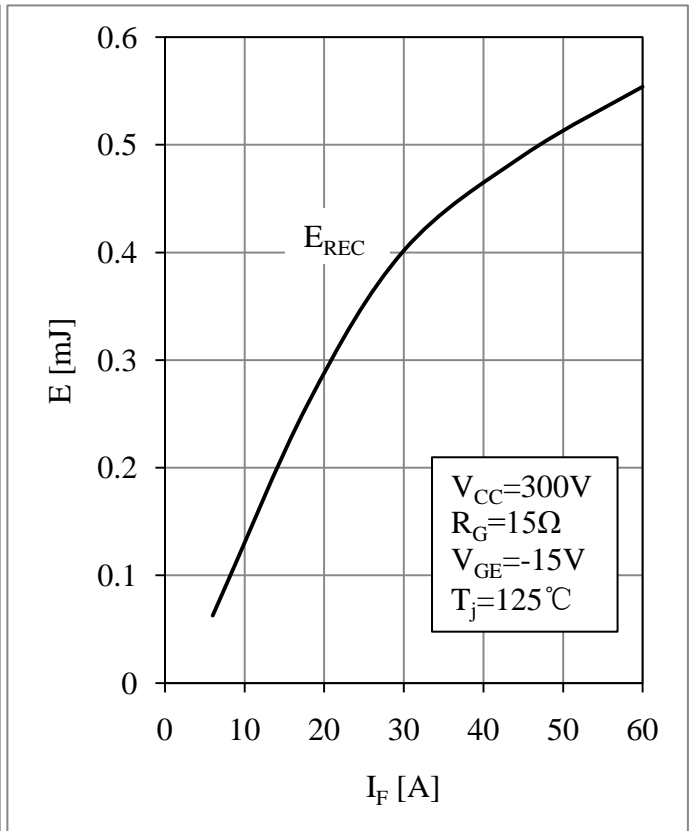


Fig 8. Diode-inverter Switching Loss vs.  $I_F$

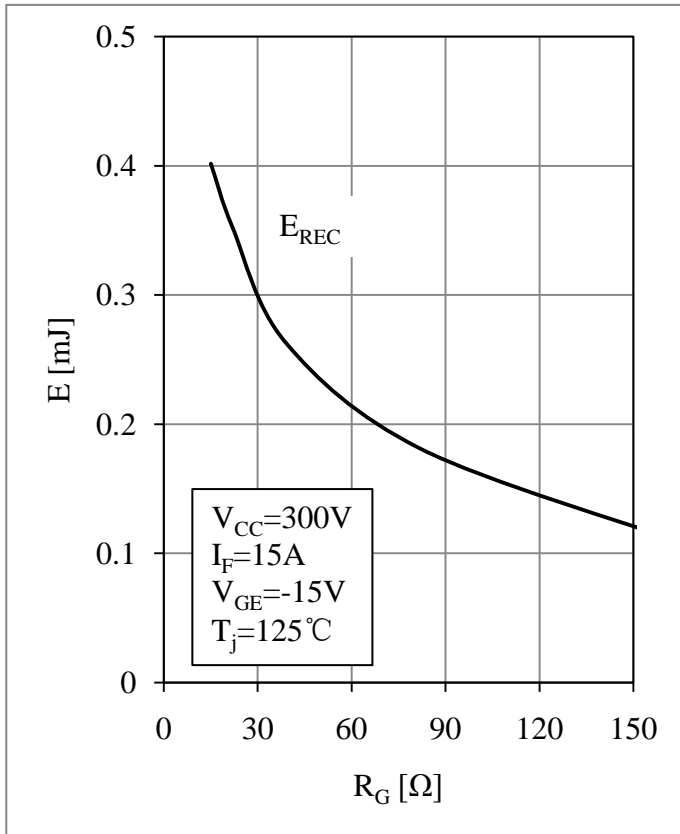


Fig 9. Diode-inverter Switching Loss vs.  $R_G$

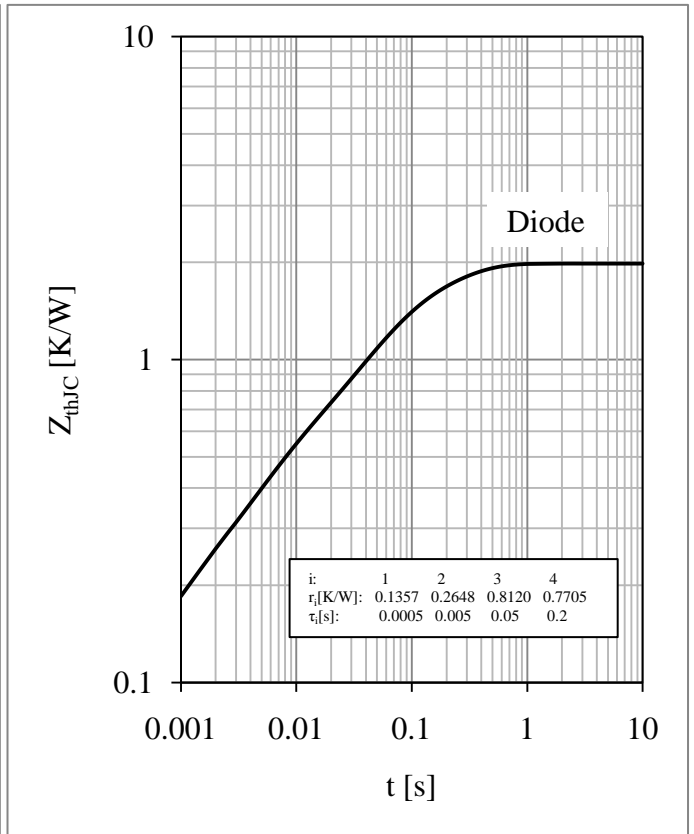


Fig 10. Diode-inverter Transient Thermal Impedance

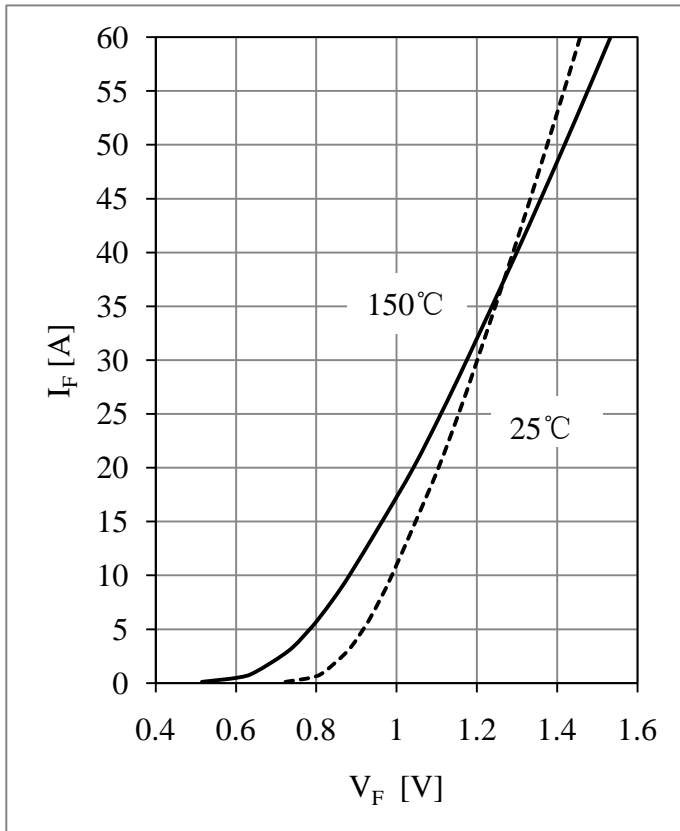


Fig 11. Diode-rectifier Forward Characteristics

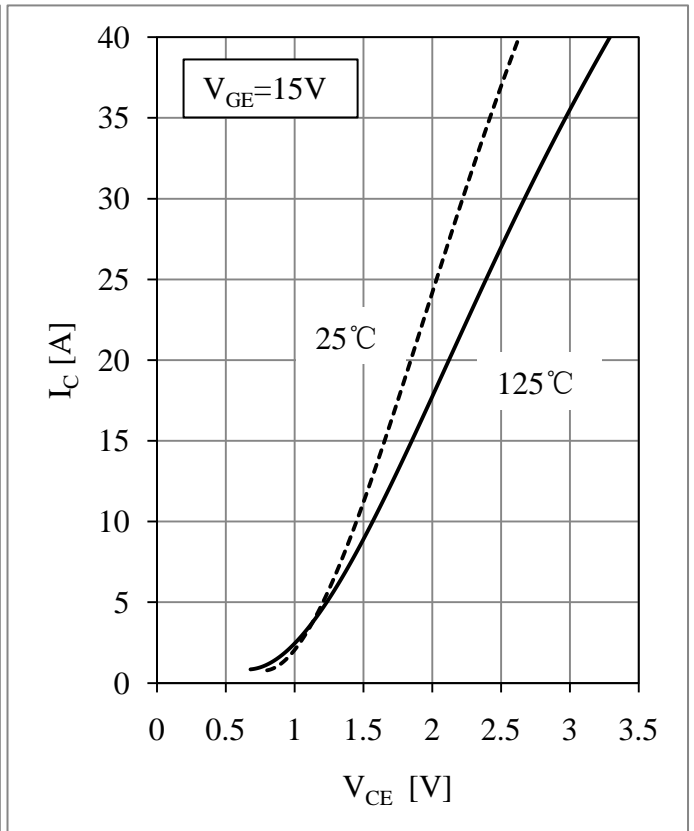


Fig 12. IGBT-brake-chopper Output Characteristics

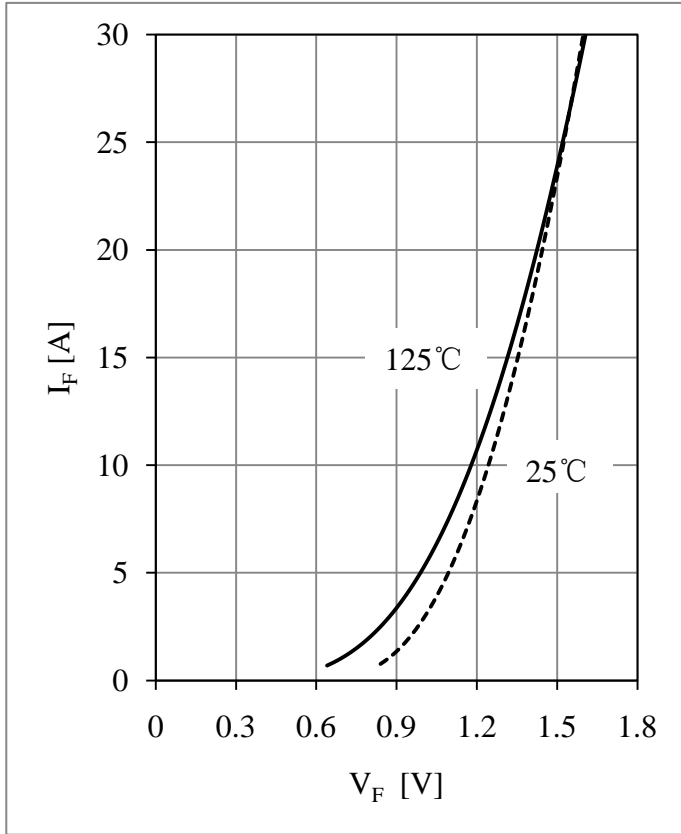


Fig 13. Diode-brake-chopper Forward Characteristics


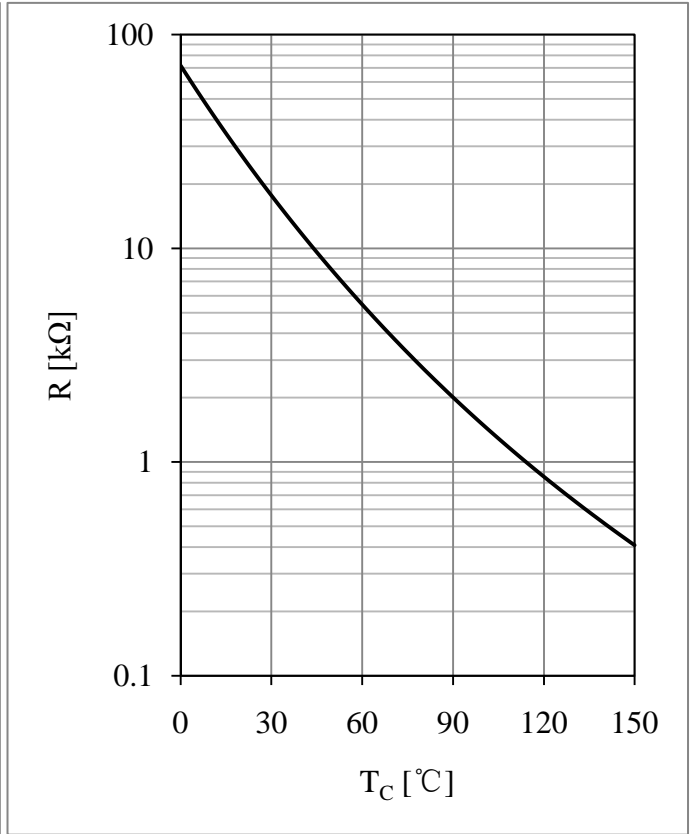



Fig 14. NTC Temperature Characteristic

### Equivalent Circuit Schematic

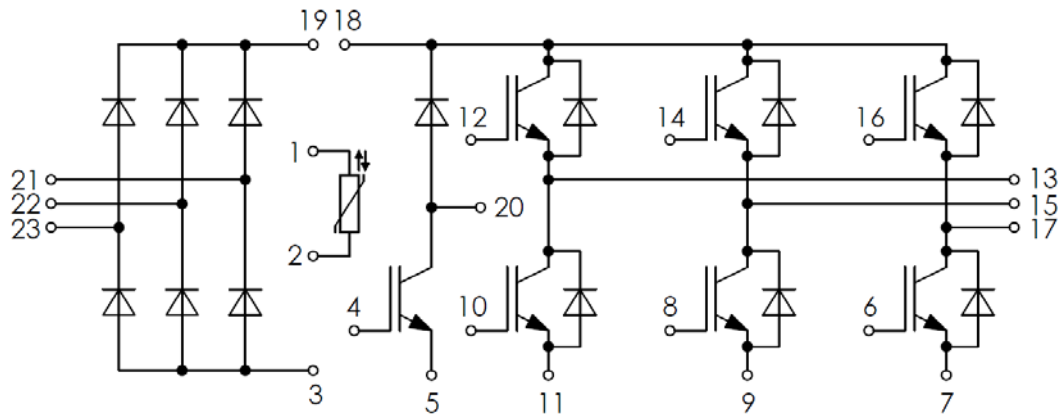

### Package Dimensions

Dimensions in Millimeters

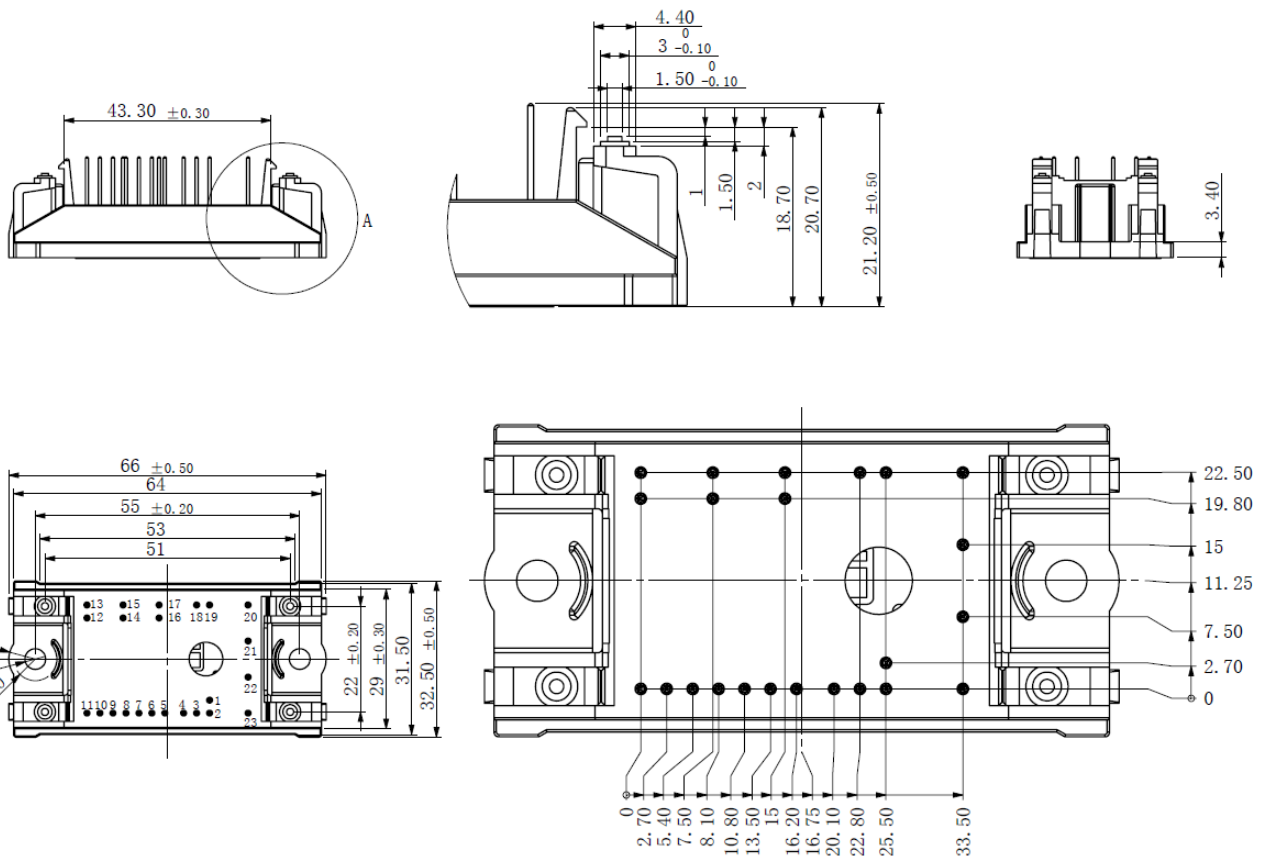

## Terms and Conditions of Usage

The data contained in this product datasheet is exclusively intended for technically trained staff. you and your technical departments will have to evaluate the suitability of the product for the intended application and the completeness of the product data with respect to such application.

This product data sheet is describing the characteristics of this product for which a warranty is granted. Any such warranty is granted exclusively pursuant the terms and conditions of the supply agreement. There will be no guarantee of any kind for the product and its characteristics.

Should you require product information in excess of the data given in this product data sheet or which concerns the specific application of our product, please contact the sales office, which is responsible for you (see [www.powersemi.cc](http://www.powersemi.cc)), For those that are specifically interested we may provide application notes.

Due to technical requirements our product may contain dangerous substances. For information on the types in question please contact the sales office, which is responsible for you.

Should you intend to use the Product in aviation applications, in health or live endangering or life support applications, please notify.

If and to the extent necessary, please forward equivalent notices to your customers.  
Changes of this product data sheet are reserved.